

4

3

2

1

REV	DRWN	CHK'D	DATE	DESCRIPTION



0.000


1.500

4.500

4X \varnothing 0.750 ∇ 0.250
 CLEARANCE TO DRILL 0.313 HOLES



4X \varnothing 0.313 THRU
 ∇ \varnothing 0.620 X 82°
 FROM INSIDE

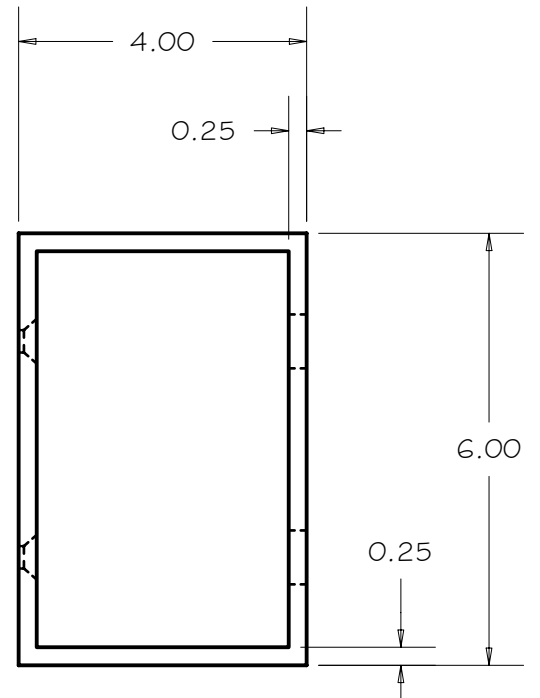

4.500

1.500

0.000


0.000 0.750

23.250 24.000

SCALE 3 / 8

TOLERANCES UNLESS OTHERWISE NOTED:
 FRACTIONAL: 0"-6": \pm 1/64" 6"-24": \pm 1/32"
 24"+: \pm 1/16"
 DECIMAL: X.X: \pm 0.1000" X.XX: \pm 0.0100"
 X.XXX: \pm 0.0050" X.XXXX: \pm 0.0001"
 ANGLES: \pm 0.5° FINISH: 125 MICRO INCHES
 BREAK ALL SHARP EDGES & CORNERS 1/64" MAX

MATERIAL	FINISH
ALUMINUM	



DRAWN	vernon	2/2/2005
CHECKED		
DESIGNED	vernon	
ENGINEER	vernon	

QTY: 2

Cassegrain ADC

TITLE FORKLIFT PICK TUBE

PROJECT CODE	DWG NO	REV
A8060	A8045	A
NEXT ASSY		

B

B

A

A

4

3

2

1